





22JUL03 E824103-2 D01631
PC1/7700 0.00-0316994.3

Request for grant of a patent

(See the notes on the back of this form for an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

21 JUL 2003

Fee: £0

1. Your reference

PADL/JCH/45971.GB01

2. Patent application number

(The Patent Office will fill in this part)

0316994.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

E2V Technologies Limited
106 Waterhouse Week
Chelmsford
Essex
CM1 2QU

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of incorporation

08457749001

England

4. Title of the invention

Smear Reduction in CCD Images

5. Full name, address and postcode in the United Kingdom to which all correspondence relating to this form and translation should be sent

Reddie & Grose
16 Theobalds Road
LONDON
WC1X 8PL

Patents ADP number (if you know it)

91001✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application
(if you know it)

Date of filing
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description	11
Claim(s)	5
Abstract	1
Drawing(s)	4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date
21 July 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

P A D LLOYD
020-7242 0901

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE 1

SMEAR REDUCTION IN CCD IMAGES

5 This invention relates to charge coupled devices (CCDs) and in particular the improvement of CCD performance at low incident light levels.

10 EP-A-0,866,501 describes the use of a multiplication register which uses impact ionisation to amplify the charge stored in an output register. The technique described in that patent application is extremely effective and can produce very high gains with little noise. Consequently, devices using multiplication registers are well suited for operation at very low incident light levels.

15 One artefact of the multiplication register is referred to as horizontal smearing. This occurs when charge is not fully transferred from one cell of the register to the next. Where an image acquired in very low light levels includes a bright object, such as a car headlight at night, the localised bright source will tend to be smeared across the image as charge which has not
20 been transferred properly is amplified on subsequent clock pulses. In a generally bright scene, such residual charge may not be noticeable, but in a generally low light level image it can produce an undesirable streak.

25 A similar streaking can be produced in the vertical direction as a consequence of the manner in which images are acquired and then clocked out. In the images described in EP-A-0,866,501 the image comprises an area array sensor which acquires light simultaneously for all pixels of the array. After a set integration time, the charge stored is
30 clocked out line by line to a store.

35 Where the device is operating in very low light levels, localised bright sources tend to be smeared vertically as, during the clocking out process, which happens from the bottom of the array, lines above the localised bright source are exposed to that bright source for a short time as they are clocked past the source.

Although the exposure time is small compared to the integration time, the localised bright source is so much brighter than the background that the light captured shows up on the image as a vertical streak. This streak will
5 extend both below and above the localised bright source, the streak above having been contributed by the clocking out of that frame and the streak below by the clocking out of the previous frame.

The problem occurs whether or not the lines of
10 accumulated charge are clocked directly to an output register or via an intermediate store. It is a problem that is inherent in any CCD that reads out images line by line, and is not related to the use of a multiplication register.

15 One approach to reducing vertical smear, also known as frame transfer smear, is to block the light to the CCD array during frame transfer. This may be achieved by introducing a shutter into the optical path which is synchronised to the frame transfer. However, practical
20 shutters have limited performance and the most suitable shutters are affected by changes in temperature.

The invention, in its various aspects, aims to address the problems of horizontal and vertical smear.

Broadly, a first aspect of the invention compensates
25 for vertical and/or horizontal smears by using edge detection techniques to locate smeared areas. Data is then substituted into these smeared areas.

More specifically, there is provided apparatus for compensating image signals produced by a CCD imager for
30 smears, comprising: an image data analyser for detecting the boundaries of a smear; and an image data replacer for replacing data between the boundaries of a detected smear with alternative image data.

Preferably, the image data analyser comprises means
35 for detecting the boundaries of a smear by detecting rates of change in the image data greater than a predefined limit

Embodiments of the invention have the advantage that smears can be simply detected and corrected for as part of the signal processing performed on acquired image data. In one embodiment of the invention, the alternative data used
5 for substitution is derived from image pixels neighbouring the detected smear. In another embodiment, the alternative data is derived by interpolation which has the advantage of looking more natural.

Preferably, the image data analyser analyses the
10 image line by line to detect intensity gradients greater than the predefined limit and so indicative of a smear. The analysis may be performed using a kernel to analyse a portion of the image data at a time.

The kernel may be used with a sliding window moveable
15 across the image to analyse the complete image.

Preferably, a temporal integrator integrates two or more images acquired by the CCD imager prior to boundary detection by the image data analyser. This has the
20 advantage of eliminating random noise, for example caused by thermal effects, prior to boundary detection.

Preferably, a coordinate extractor extracts the coordinates of detected smear boundaries and provides these coordinates to the image data replacer.

Embodiments of this aspect of the invention have the
25 advantage that they can be used to detect and compensate for vertical frame transfer smear which arises as lines are read out from the active image area. It may also be used to compensate for horizontal smear caused by incomplete charge transfer in a multiplication register.
30 Embodiments of the invention are particularly suited to use in low light level environments where the transitions between dark area and smeared signals have a large gradient.

A second aspect of the invention compensates for
35 frame transfer smear by deriving an error signal indicative of charge accumulated during read out of a line. This error signal is then subtracted from the actual

line signals. Masked lines of the image, which are the last to be read out, and which are only exposed to incident light during frame transfer, may be used to derive the error signal.

5 More specifically, there is provided apparatus for compensating for frame transfer smear in a CCD imager, the imager comprising an image area having a plurality of rows of pixels for accumulating charge during an image acquisition period, each row corresponding to a line of
10 the image, an output register for receiving accumulated charge row by row during a transfer mode to produce line signals, and at least one row of pixels masked from incident radiation and arranged on the side of the image area opposite the side on which pixels are transferred to
15 the output register, the apparatus comprising a subtractor for subtracting a signal corresponding to charge accumulated during the transfer mode and transferred to the output register as lines corresponding to the at least one masked row, from the line signals corresponding to the
20 rows of the image area.

Embodiments of this aspect of the invention have the advantage that frame transfer smears can be compensated for reliably where pixels of the image have not been saturated and detail in the image is recovered. It may be
25 used in conjunction with the first aspect of the invention.

Preferably the CCD sensor comprises a plurality of masked rows. The error signal may be generated from an average of the masked row line signals acquired during the
30 frame transfer period.

A third aspect of the invention increases the dynamic range of the CCD imager by varying the gain on parts of an image or selected images. For example, the gain may vary between two levels on alternate lines or frames.

35 More specifically, there is provided apparatus for controlling a CCD imager, the imager comprising an image area for acquiring charge from incident radiation, an

output register for receiving acquired charge from the image area during a transfer mode, and a multiplication register for multiplying charge received from the output register, the apparatus comprising a gain controller for
5 controlling the gain of the multiplication register to vary the gain of the multiplication register for selected images or portions of images.

Preferably, the gain is alternatively low and high on alternative lines or images although other low/high ratios
10 may be used.

Embodiments of this aspect of the invention have the advantage that the dynamic range of the CCD imager may be extended thus allowing detail to be presented in both dark and light areas of the image. This in turn improves the
15 usefulness of the smear compensating techniques of the first and second aspects of the invention.

Embodiments of the invention will now be described, by way of example only, and with reference to the accompanying drawings, in which:

20 Figure 1 is a schematic view of a known CCD image having a multiplication register;

Figure 2 is a schematic view of a horizontal and vertical smear reduction circuit;

25 Figure 3 is a schematic view of a subtraction circuit embodying a second aspect of the invention; and

Figure 4 is a similar view to Figure 1, modified according to a third aspect of the invention.

The CCD device 1 illustrated in figure 1 comprises an image area 2, a store section 3 and an output or read-out
30 register 4. The output register 4 is extended in a linear direction to provide a multiplication register 5, whose output is connected to a charge detection circuit 6. At the top of the image area 2 is a number, for example 3, of masked rows 8 which are shielded from incident radiation.
35 It is commonplace to have such masked rows in a CCD array although they are often located at the bottom of the

array. The remaining active image area comprises several hundred lines of pixels, for example 288 lines.

During operation, radiation incident at the active lines of the image area is converted to signal charge, the magnitude of which is representative of the intensity of the radiation imposing on the pixels of the active image array. After an image acquisition period of typically 20ms, drive pulses are applied to control electrodes 10 and 12 to transfer the charge accumulated at the active pixels to the store section 3. The pixels are transferred line by line with a typical transfer time of $1\mu\text{s}$ per line, with the bottom line being transferred out first.

When a complete line has been transferred, drive signals are also applied to control electrodes 12 of the store to cause charge to be transferred line by line to the output register 4. When a row of charge is transferred to the output register, drive pulses are applied to control electrodes 14 of the output register to transfer charge from the elements of the output register to the multiplication register 5. Charge multiplication is achieved in the multiplication register by applying high amplitude drive pulses via multiplication register electrodes 17 to transfer charge from one element to the next and to increase the amount of charge by impact ionisation. Each signal charge packet stored at the output register 4 undergoes an identical multiplication process as it proceeds through the elements of the multiplication register.

Referring now to figure 2, a first aspect of the invention aims to eliminate horizontal and/or vertical smearing by using edge and/or gradient detection to identify smeared areas and then to remove the smeared areas and replace them with image data substituted from elsewhere, or interpolated image data.

The processing of the signal using the circuit of figure 2 is performed on the output from the charge detection circuit 6. Thus, the input to the smear

reduction circuit of figure 2 is a digital video signal generated from the CCD imager of figure 1. The input signal is first passed to a temporal integrator 20 which is connected to a field or frame store 22. The temporal
5 integrator reduces the effects of random noise which is particularly visible at low light levels and averages signals over a number of fields. The term field is used here to refer to one image captured by the CCD imager. Where the output is a conventional 2:1 interlace video
10 signal, one image captured by the CCD imager will form a field of the video signal. However, if no interlacing were used, an image captured by the CCD imager would form a frame of the output video signal.

The output of the temporal integrator is passed to a
15 spatial kernel processor 24 which itself is coupled to a sliding window mechanism 26. The kernel processor and sliding window are used to search the image or a specified area of the image to detect vertical or horizontal smears and relies on the fact that the smear will produce a large
20 rate of change between its boundaries compared with that of neighbouring real image pixels. In its simplest form, the kernel processes the image on a line by line basis searching for a gradient that exceeds predefined thresholds. This detects one edge of the smear on that
25 line. The other edge is found by continuing until a negative gradient is found that exceeds the predefined threshold. The sliding window mechanism 26 is used to provide an efficient identification of the smeared areas and defines a vertical edge detector mask. This may be a $n \times n$ array of multipliers, n may typically be 3, which is
30 moved across the image to multiply the image in groups of pixels. Other methods of edge or transition detection may be used.

A coordinate extractor 28 extracts and stores the
35 coordinates of the smeared edges. The information masked by the optical overload must then be regenerated. If the CCD pixels have been saturated then no information can be

retrieved from the smear area and so an approximation to the original image must be made. This task is performed by a data replacement unit 30. The data replacement unit may use any conventional data replacement technique. For example it may average neighbouring pixels to produce an approximation of the smeared area or it may interpolate the intensity data between the edges of the smear. The latter is presently preferred as it results in a more natural image as a whole.

10 The circuit of figure 2 may also be used for a horizontal smear detection and compensation by concentrating on the horizontal axis to detect the height of the horizontal smear and correct it on the manner described. Typically, the two types of smear detection and
15 compensation will be performed one after the other.

Referring back to figure 1, the CCD array includes a number of masked rows of CCD elements which do not receive any incident light. In a second aspect of the invention, these rows are used to compensate for vertical, or frame
20 transfer, smear either instead of or in addition to the compensation technique referred to with reference to figure 2.

The masked lines are typically used to correct for thermal noise. However, as they are located at the top of
25 the array, they can be used to derive a signal that also compensates for vertical smear. The charge accumulated in each row of the array is passed row by row to the output register 4. The contents of the dark or masked rows may also be passed to the output register. As these rows are
30 at the top of the array, they will be clocked line by line through the active array during which time they will accumulate charge. This accumulated charge is approximately equal to the vertical smear and can be used to derive a correction signal which can be subtracted from
35 the signal generated from the active rows of the area array. This is possible as the smear is constant both in position and intensity from row to row.

An integration time of 20 ms was previously mentioned for image acquisition. This is typical for CCIR based TV systems. The transfer rate is typically $1\mu\text{s}$ per line. Thus, if a bright object illuminates 10 pixels vertically, the corresponding pixels in the rows above the bright object, including the masked rows will accumulate charge from that bright object for $10\mu\text{s}$. Thus, if the bright source is less than 2000 times brighter than the average scene it will still be possible to recover information by subtracting the smear signal from all pixels. This is based on the requirement that the smeared signals are not saturated so removing the ability to compensate by subtraction of the derived smear signal. In practice, this technique works at even higher levels of overload as the average illumination level is usually less than CCD saturation. Similarly, if the bright source illuminates more than 10 pixels, the level of overload before saturation will be reduced as the time exposed to the bright source increases.

Where saturation occurs, the technique described with respect to figure 2 may be used to compensate further for vertical smear.

Thus, in the embodiment of this aspect of the invention illustrated in figure 3, the output from the charge multiplier 5 (fig 1) is passed via amplifier 6 and a digitiser 39 to a switch which, for example under the control of a counter, passes the masked lines to a first store 42 and the active lines to an active line frame store 44. It is necessary to store the active lines as the masked lines are read out after the active lines. The output from the masked line store is then subtracted from the output of the active line store by subtractor 46 which is an n-bit parallel subtractor, where n is the number of bits per pixel. The error signal may be simply the signal stored for one dark row or may be the average of the pixel values for two or three rows. The output of the frame

store 44 is read out sequentially line by line so that the error signal is subtracted from each line in turn.

In both the embodiments of the first and second aspects of the invention described above, smear
5 compensation will only be effective where there are relatively limited levels of overload. It is therefore desirable to extend the dynamic intra-scene range of the CCD imager. A third aspect of the invention varies the CCD multiplication gain on a line by line or field (image) by
10 field basis. This enables the intra-scene dynamic range to be extended greatly. Using the image of figure 1, the range may be varied by 500-1000 times.

Referring to figure 4, a modification of figure 1 is shown in which the gain control is, itself, controlled by
15 a switch 50 which is switched every line, for example by a system clock which controls the voltages to the electrode 17. This may be switched every line so that odd lines are set to a gain of, for example, 1000 whereas for even numbered lines the gain is set to 1. On odd lines,
20 details in the darkest parts of the image are displayed but bright sources would be clipped due to the limited capacity of the multiplication register to amplify the charge generated by bright sources. At the even lines, there will be insufficient multiplication to display dark
25 areas of the image but detail in bright areas can be seen. The alternate lines can be combined by the digital signal processing portion of the imager to produce a pair of identical lines each displaying detail in both light and dark areas of the screen. Instead of alternate high/low
30 gain, other arrangements could be made. For example every third or fourth etc. line could be a low gain or high gain line. Similarly, the processing performed on the high and low gains may be more sophisticated than simple addition.

This aspect of the invention reduces the vertical
35 resolution of the image. However, this is not a serious problem with low light level images where resolution is already limited by a number of other factors.

As an alternative, the gain could be varied such that it is set low for one image (field) and then high for the next image (field). As in the line by line example, this 1:1 low/high ratio could be varied. The two images can then be combined in a similar manner to the line by line range although the frame update rate is reduced by half for a 1:1 ratio.

Various modifications to the embodiments described above are possible and will occur to those skilled in the art. Although described in relation to CCD images using multipliers, the vertical (frame transfer) smear compensation techniques and dynamic range extensions technique are not limited to such arrangements and may be implemented on conventional CCDs. Similarly, none of the aspects of the invention described are limited to CCD arrays in which lines or frames are stored before being output to an output register.

Embodiments of the invention in its various aspects have a number of advantages. Each of the first and second aspects reduce or eliminate the effects of vertical smear by processing the image after acquisition. The two aspects may be used together or separately. Furthermore, the first aspect of the invention may also reduce the effects of horizontal smear due to charge retention in the multiplication register. This is especially advantageous at the low light levels to which CCD imagers using multipliers are particularly well suited. The third aspect of the invention has the advantage of increasing the dynamic range of the CCD array. This is beneficial in its own right but is also advantageous in increasing the usefulness of the smear compensation techniques by reducing the risk of overloading the output from individual CCD cells.

Various other modifications are possible and will occur to those skilled in the art without departing from the scope of the invention which is defined by the attached claims.

CLAIMS

1. Apparatus for compensating image signals produced by a CCD imager for smears, comprising:
 - 5 an image data analyser for detecting the boundaries of a smear; and
 - an image data replacer for replacing data between the boundaries of a detected smear with alternative image data.
- 10 2. Apparatus according to claim 1, wherein the image data analyser comprises means for detecting the boundaries of a smear by detecting rates of change in the image data greater than a predefined limit
- 15 3. Apparatus according to claim 1 or 2, wherein the alternative image data is derived from image pixels neighbouring the detected smear.
- 20 4. Apparatus according to claim 1 or 2, wherein the alternative image data is derived by interpolation of image data.
- 25 5. Apparatus according to claim 2, 3, or 4, wherein the image data analyser analyses the image line by line to detect intensity gradients greater than the predefined limit.
- 30 6. Apparatus according to any preceding claim, wherein the image analyser comprises a kernel for analysing a portion of the image data at a time.
- 35 7. Apparatus according to claim 6, wherein the kernel has a sliding window to define the portion of the image being analysed by the kernel and moveable across the image to analyse the complete image.

8. Apparatus according to any preceding claim, comprising a temporal integrator for integrating at least two images acquired by the CCD imager prior to boundary detection by the image data analyser.

5

9. Apparatus according to any preceding claim, comprising a coordinate extractor for extracting the coordinates of the smear boundaries and providing the extracted coordinates to the image data replacer.

10

10. Apparatus according to any preceding claim, wherein the image analyser detects the boundaries of vertical smears produced on transfer of image data from pixels of the CCD imager.

15

11. Apparatus according to any preceding claim, wherein the CCD imager includes a multiplication register for multiplying charge produced by the CCD imager and the image analyser detects the boundaries of horizontal smears produced by incomplete charge transfer in the multiplication register.

20

12. Apparatus according to any preceding claim, wherein the CCD imager comprises an image area having a plurality of rows of pixels for accumulating charge during an image acquisition period, each row corresponding to a line of the image, an output register for receiving accumulated charge row by row during a transfer mode to produce line signals, and at least one row of pixels masked from incident radiation arranged on the side of the image area opposite the output register, the apparatus comprising a subtractor for subtracting signal corresponding to charge accumulated during the transfer mode and transferred to the output register as lines corresponding to the at least one masked row, from the line signals corresponding to the rows of the image area.

25

30

35

13. Apparatus for compensating for frame transfer smear in a CCD imager, the imager comprising an image area having a plurality of rows of pixels for accumulating charge during an image acquisition period, each row
5 corresponding to a line of the image, an output register for receiving accumulated charge row by row during a transfer mode to produce line signals, and at least one row of pixels masked from incident radiation and arranged on the side of the image area opposite the side on which
10 pixels are transferred to the output register, the apparatus comprising a subtractor for subtracting a signal corresponding to charge accumulated during the transfer mode and transferred to the output register as lines corresponding to the at least one masked row, from the
15 line signals corresponding to the rows of the image area.
14. Apparatus according to claim 12 or 13, wherein the CCD imager further comprises a store arranged between the image area and the output register.
20
15. Apparatus according to claim 12, 13 or 14, wherein the CCD sensor comprises a plurality of masked rows.
16. Apparatus according to claim 15, wherein a line
25 signal is generated corresponding to each masked row and the error signal is generated from an average of the masked row line signals.
17. Apparatus according to any preceding claim, wherein
30 the CCD imager comprises a multiplication register for multiplying charge received from the output register, the apparatus comprising means for varying the gain of the multiplication register for selected images or portions of images.
35
18. Apparatus for controlling a CCD imager, the imager comprising an image area for acquiring charge from

incident radiation, an output register for receiving acquired charge from the image area during a transfer mode, and a multiplication register for multiplying charge received from the output register, the apparatus
5 comprising a gain controller for controlling the gain of the multiplication register to vary the gain of the multiplication register for selected images or portions of images.

10 19. Apparatus according to claim 17 or 18, wherein the gain is adjusted to be relatively high and relatively low on alternate lines of the image.

15 20. Apparatus according to claim 19, wherein the gain is adjusted to be relatively high and relatively low on alternate images.

20 21. A CCD imaging apparatus comprising apparatus according to any of claims 1 to 20.

22. A CCD camera comprising a CCD imager and apparatus according to any of claims 1 to 20.

25 23. Apparatus for compensating image signals produced by a CCD imager for smears, substantially as herein described with reference to figure 2, figure 3 or figure 4 of the accompanying drawings.

30 24. A CCD imager comprising apparatus for compensating image signals produced by a CCD imager for smears, substantially as herein described with reference to figure 2, figure 3 or figure 4 of the accompanying drawings.

35 25. A CCD camera comprising a CCD imager and apparatus for compensating image signals produced by a CCD imager for smears, substantially as herein described with


reference to figure 2, figure 3 or figure 4 of the accompanying drawings.

ABSTRACT

(Figs 1 & 2)

SMEAR REDUCTION IN CCD IMAGES

5 Vertical and horizontal smear in images produced by a
CCD imager can be compensated for by detecting the
boundaries of the smear and substituting data from an
alternative part of the image, or interpolated data within
those boundaries. Vertical, or frame transfer, smear can
10 also be compensated for by producing an error signal from
charge accumulated during frame transfer and corresponding
to one or more masked rows of the CCD imager. This error
signal can be subtracted from the line signals
corresponding to each row of the CCD images receiving
15 incident radiation during image acquisitions. The CCD
imager includes a multiplication register. The dynamic
range of the imager may be extended by varying the gain of
the multiplication register, for example on a line-by-line
or frame-by-frame basis.




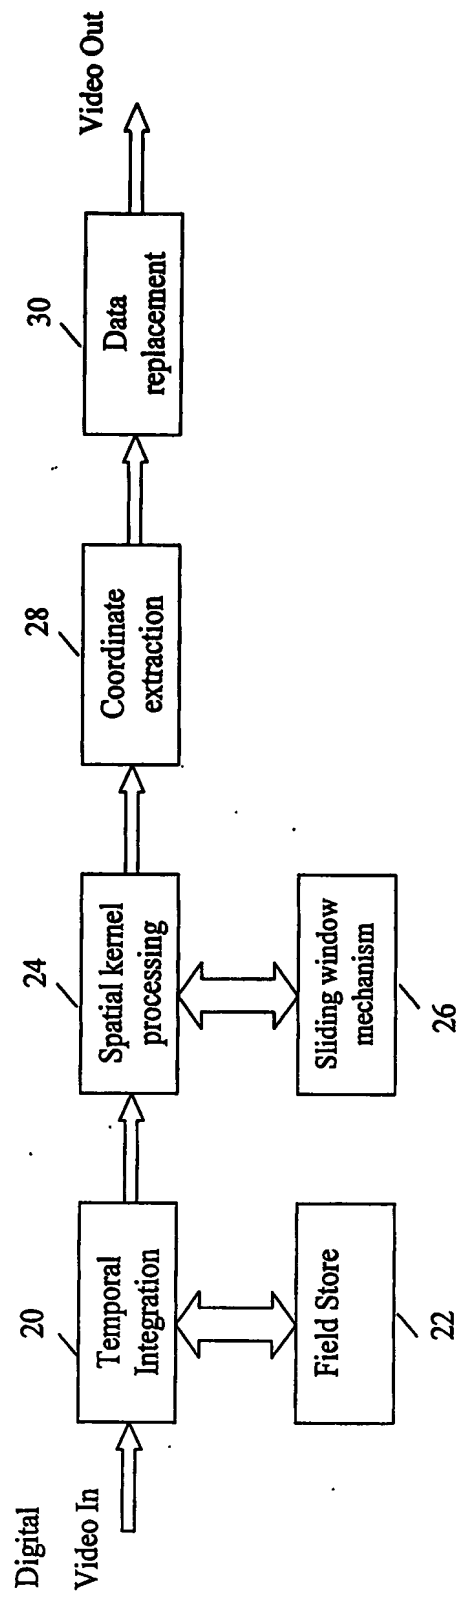


Figure 2

**Figure 3**

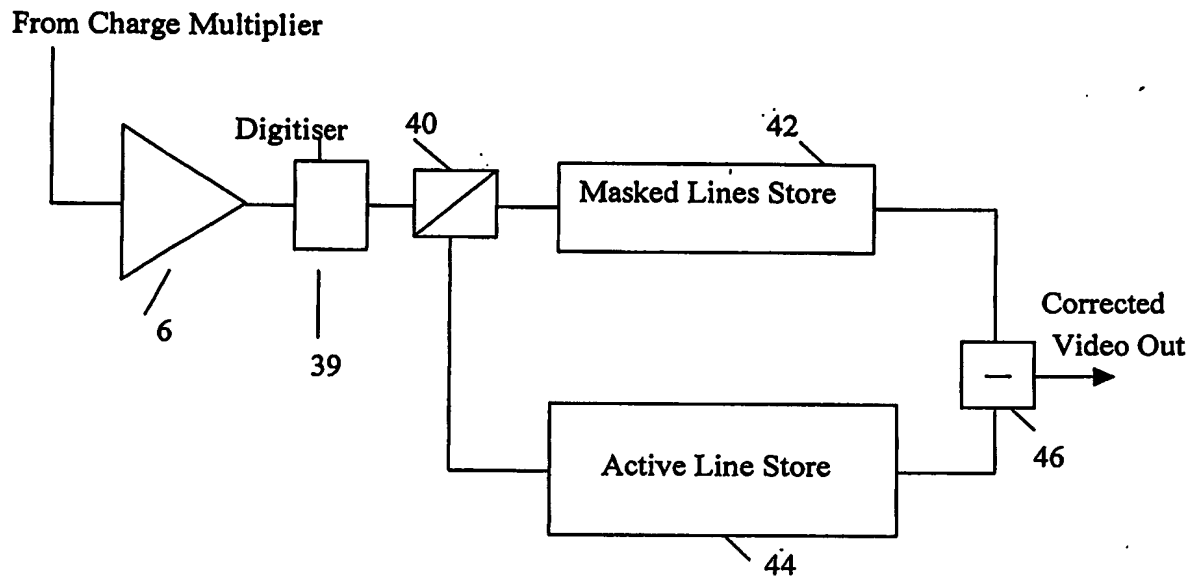

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.